# CHF664TC


















## Electric combi oven with touch screen 6 trays 600 x 400 mm

All the space you need to give vent to your creativity in the kitchen is held in a medium-

sized oven, which has great versatility.

Thanks to the 6 trays measuring 600x400 mm, the two bi-directional motors and steam cooking, you can diversify the cooking of leavened products and fine pastry products to achieve the best taste. Everything is handled with a simple touch directly on the new TFT 7" 800x480 capacitive colour touch screen! The technological evolution of MILLENNIAL ovens to enhance the quality of your dishes.

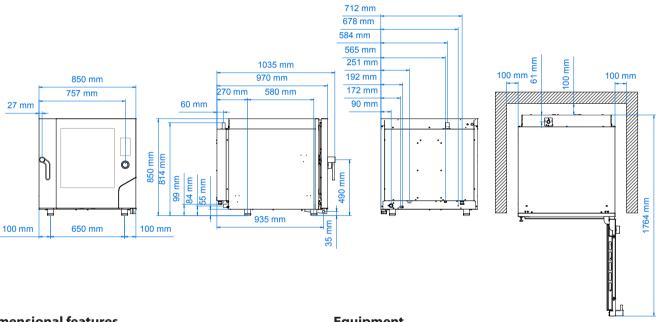

### **Dimensional features**

Dimensions (WxDxH mm)	850 x 1035 x 850
Weight (kg)	108
Distance between rack rails (mm)	80

### **Electrical features**

Liectifical features	
Power supply (kW)	11,4
Frequency (Hz)	50/60
Voltage (V)	AC 380/400 3N
N° motors	2 bidirectionals
Boiler (kW)	/
Protection against water	IPX5

<b>Functional features</b>	
Power	Electricity
Capacity	N° 6 trays/grids 600 x 400 mm
Type of cooking	Semistatic + ventilated
Steam	Direct steam controlled by touch screen (10 levels)
Cooking chamber	AISI 304 stainless steel
Temperature	30 - 270 °C
Temperature control	Digital probe thermometer
Control panel	Touch screen
N° programs	500
Programmable cooking steps	10
Pre-heating temperature	180 ℃
Pre-heating function	Programmable
Door	Right side opening Ventilated Inspectionable glass
Modularity	Yes
Feet	Adjustable

## **Equipment**

with pallet (WxDxH mm)	910 x 1090 x 1015 mm
Lateral supports	1 right + 1 left
Cable	Three-phase+neutral [5G 2,5]-L=1600 mm
USB port	
Multipoint core probe cod. C	HSC3P
Plug for "vacuum cooking" p	robe cod. CHSC-SV
Automatic washing system in	ntegrated
Condensate collection bowl,	with drain on door
Hinge with door locking for o	openings adjusted at 60°, 90°, 120°, 180°

Vietnamese HACCP system Adjustable door hinges

Patented fan guard system Airflo	wlogic™
Patented system for direct steam I	Humilogic™
Patented system for cooking chan	nber drying <b>Drylogic™</b>
Available on request at the order	Voltage (V) : AC 220/230 3
	Left side opening door
Humidity management software	
Wi-Fi communication system	
Knob for quick selection of the tou	uch screen
Programmable oven start	
N ° 40 recipes stored	

Slovenian, Spanish, Swedish, German, Thai, Turkish, Ukrainian, Hungarian,